


Part Number	Output V	Output @230V I _{max}	W @230V	W @110V	Dimensions A x B x c	ENECEC 05
A40ZBX10000B	24V	4,16A	100W	60W	210 x 75 x 35	•
A40ZBX15000B	24V	6,25A	150W	60W	210 x 75 x 35	•
A40ZBX10048B	48V	2,10A	100W	60W	210 x 75 x 35	

Bluetooth ZBXT* On request
 Zigbee ZBX



Datasheet download

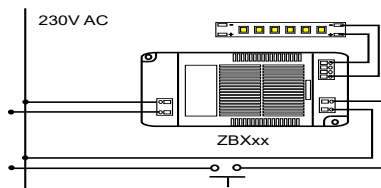

Instruction download

Alimentatore LED Wireless - Zigbee +BLE +Push

- Alimentatore indipendente - IP20 - Classe II di isolamento
- Uscita in tensione costante 24V/48V, ±5%
- Comando Zigbee 3.0 + Bluetooth Low Energy
- Disponibile APP Android, IOS
- Comando a pulsante lato primario con possibilità di impianti multipli sincronizzati

Wireless Led Driver - Zigbee+BLE +Push

- For independent mounting - IP20 - Insulation class II
- Output in steady voltage 24V/48V, ±5%
- Zigbee 3.0 + Bluetooth Low Energy control
- APP IOS/ANDROID available
- Push control on the primary side with possible multiple connection by synchro.

